

# ER12H-1600

**EFORT**

**ER12H-1600,**  
Maxium payload 12 kg with maxium reach 1604 mm.

## Highlights

Thanks to the large and hollow design, the cable can be routed in a hollow way, effectively improving the service life of the cable, and the posture change in a narrow space is more flexible;  
High-rigid gearbox with strong impact resistance helps customers challenge various application scenarios;  
Thanks to the high stiffness transmission design and advanced trajectory algorithm, the improved robot accuracy performance helps customers to face variety of application scenarios.

## Applications

It can be used in handling operations, sorting, grinding, polishing, etc.

## Industries

Suitable for metal parts, logistics and other industries.




## SPECIFICATIONS


<b>Model</b>	ER12H-1600	
<b>Type</b>	Articulated	
<b>Controlled axes</b>	6 Axes	
<b>Max. payload on wrist</b>	12 kg	
<b>Repeatability</b>	±0.03 mm	
<b>Robot weight</b>	170 kg	
<b>Reach</b>	1604 mm	
<b>Robot IP grade</b>	IP54 / IP67 (Wrist)	
<b>Cabinet IP grade</b>	IP20/ IP54 (Optional)	
<b>Drive mode</b>	AC servo drive	
<b>Installation</b>	Floor, Upside-down, Wall	
<b>Installation enviroment</b>	<b>Ambient temperature</b>	0~45 °C
	<b>Ambient humidity</b>	RH≤80% (No dew nor frost allowed)
	<b>Vibration acceleration</b>	4.9 m/s <sup>2</sup> (<0.5 G)

<b>Allowable load moment at wrist</b>	<b>J4</b>	22 N·m
	<b>J5</b>	22 N·m
	<b>J6</b>	9.8 N·m
<b>Allowable load inertia at wrist</b>	<b>J4</b>	0.65 kg·m <sup>2</sup>
	<b>J5</b>	0.65 kg·m <sup>2</sup>
	<b>J6</b>	0.17 kg·m <sup>2</sup>
<b>Maximum speed</b>	<b>J1</b>	265°/sec
	<b>J2</b>	255°/sec
	<b>J3</b>	270°/sec
	<b>J4</b>	450°/sec
	<b>J5</b>	450°/sec
	<b>J6</b>	700°/sec
<b>Motion range</b>	<b>J1</b>	±170°
	<b>J2</b>	+85°/-150°
	<b>J3</b>	+175°/-85°
	<b>J4</b>	±190°
	<b>J5</b>	±190°(The connect outside robot body.) ±140°(The connect inside robot body.)
	<b>J6</b>	±450°(The connect outside robot body.) ±220°(The connect inside robot body.)


## OPERATING SPACE

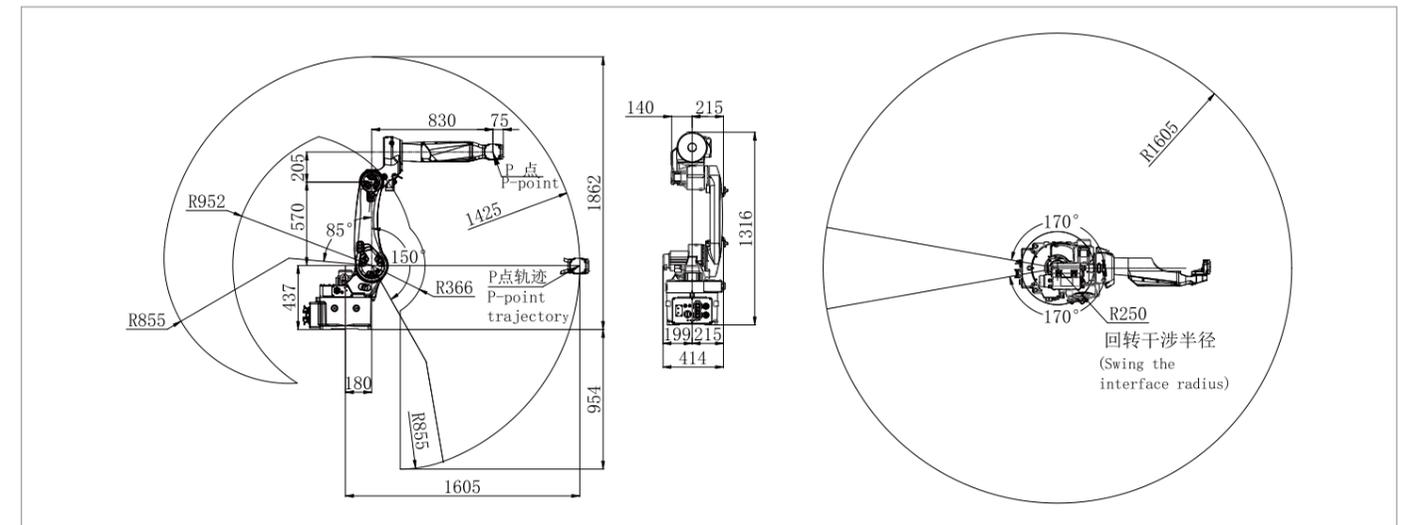

## BASE MOUNTING SIZE

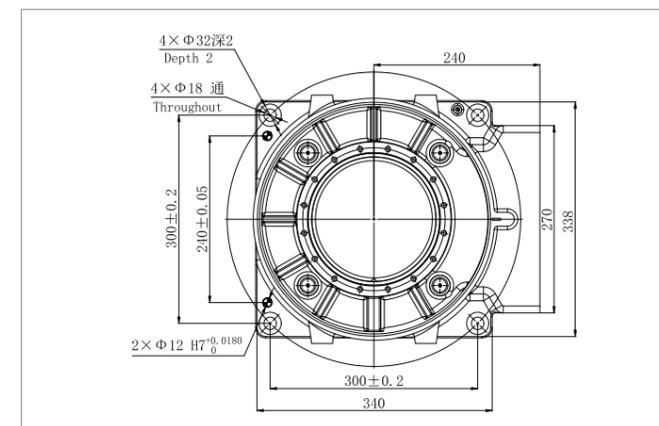

## END FLANGE MOUNTING SIZE

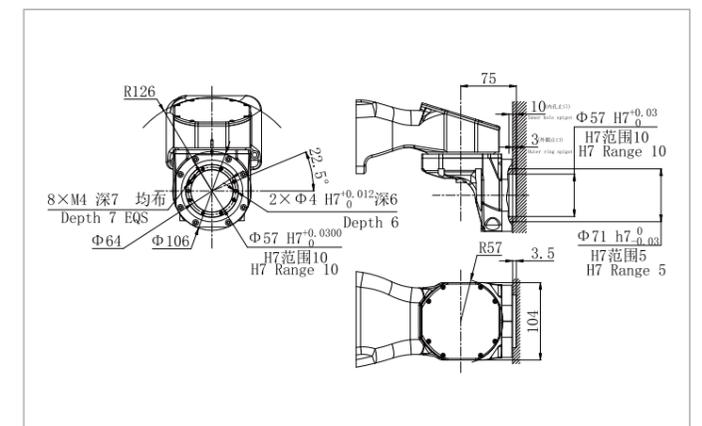

**EFORT Intelligent Robot Co., Ltd.**

PHONE: (00 86) 400-052-8877  
ADDRESS: No. 96, Wanchun East Road, Wuhu, China  
(Anhui) Pilot Free Trade Zone  
WWW.EFORT.COM.CN

\*The final interpretation right belongs to EFORT Intelligent Robot Co., Ltd. Any updates will be made without prior notice.

Information Release Time 2025/04